SPT Safe Spider Crane,
Protecting Construction, Protecting People!

HENAN SPT MACHINERY
EQUIPMENT CO., LTD.

Global Leading Brand of Spider Crane

· Global Two-year Warranty ·

SPT299





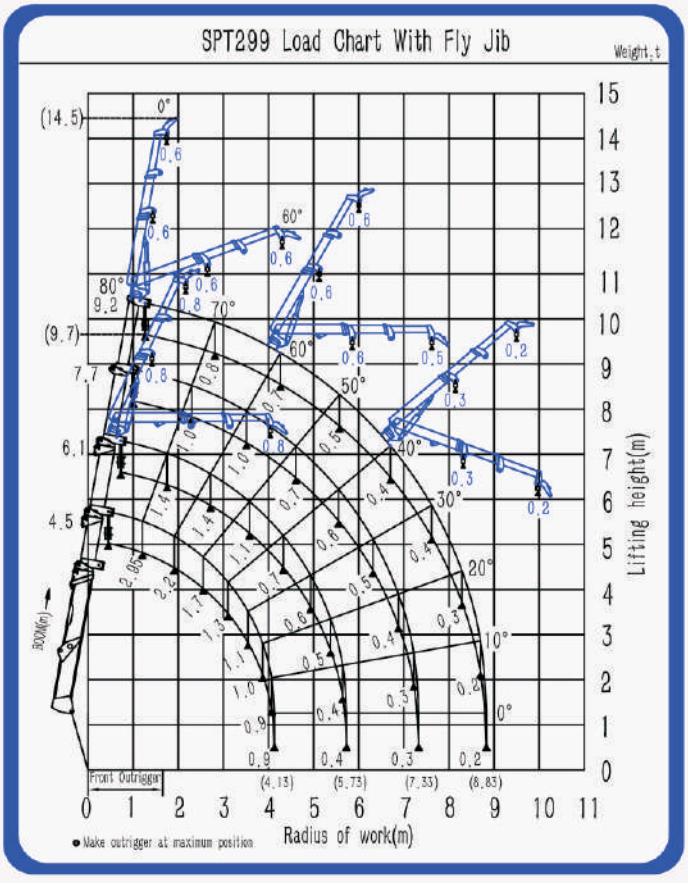

Capacity: 2.95t×1.4m
Ground lifting height:
9.7mX0.8t / 14.5mx0.6t (with fly jib)
Outrigger Maximum extention dimension (mm) :
4220 (Length) X3700 (Front) X4100 (Back)
Walking speed: 0-2.0km/h
Motor voltage: AC380V(three phase)
Diesel engine:
Model: 3TNV74F (Yanmar)
Rated output: 11.2kW/2400 min^{-1}
Applied regulation/Altitude:
EPA-Tier4, EC stage V/1200m
Type of operation (crane, walk, outrigger) :
Wireless remote and manual
Dimension (Length×Width×Height) :
3500mm×900mm×1650mm
Weight (Crane + Hydraulic fly jib) :
2700kg+200kg

SPT499



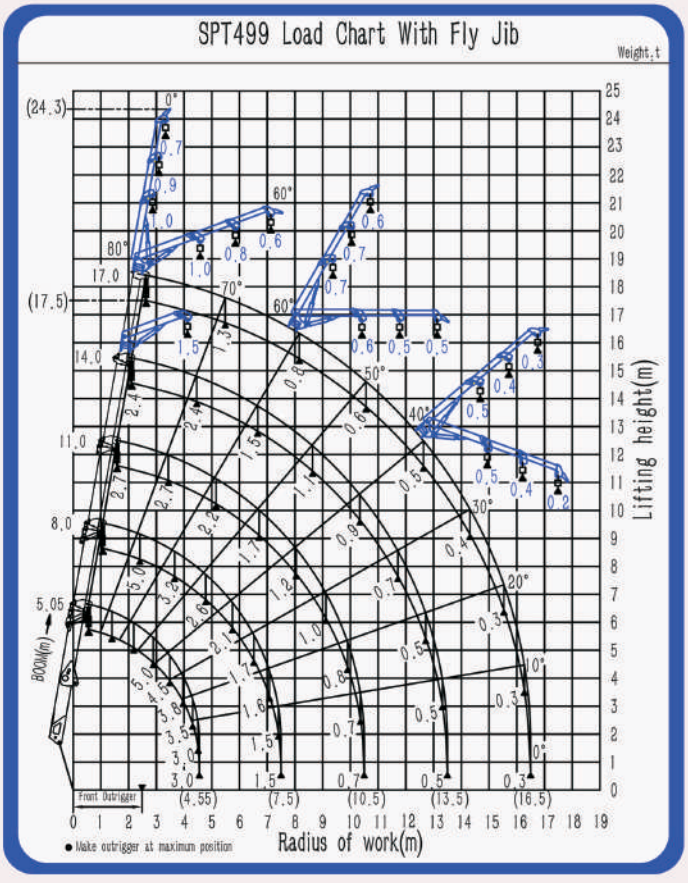

Capacity: 5.0t×3.0m

Ground lifting height :

17.5mx1.3t / 24.3mx0.7t (with fly jib)

Outrigger Maximum extention dimension (mm) :

5560 (Length) X5850 (Front) X5760 (Back)

Walking speed: 0-2.0km/ h

Motor voltage: AC380V(three phase)

Diesel engine:

Model: D1703 (Kubota)

Rated output: 17.1kw/2200 min^{-1}

Applied regulation/Altitude:

EPA-Tier4, EC stage V/1200m

Type of operation (crane, walk, outrigger) :

Wireless remote and manual

Dimension (Length×Width×Height) :

5480mm×1400mm×2000mm

Weight (Crane + Hydraulic fly jib) :

6450kg +350kg

SPT1009



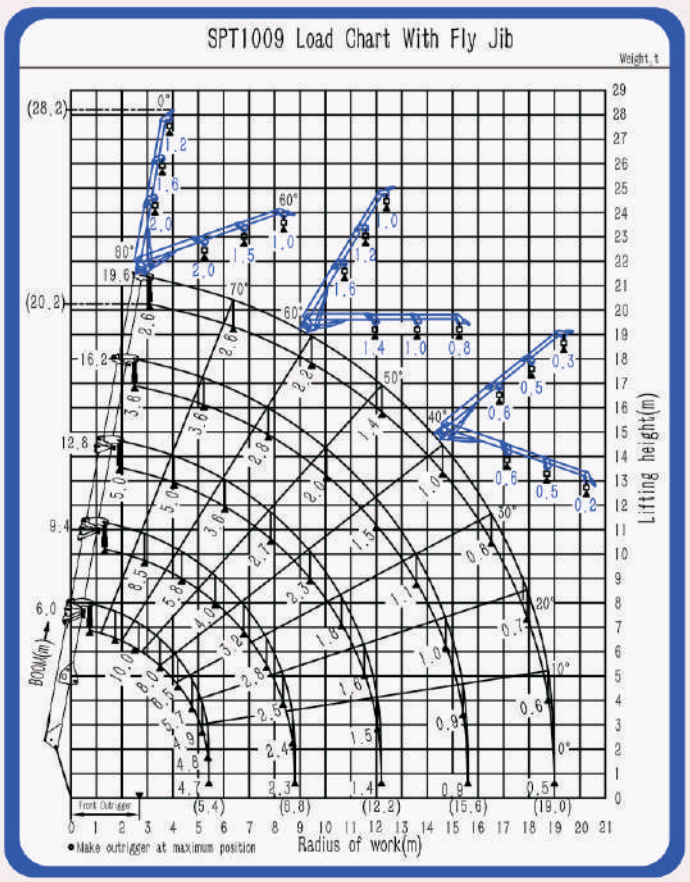

Capacity: 10.0t×2.5m
Ground lifting height:
20.2mx3.0t / 28.2mx1.2t(with fly jib)
Outrigger Maximum extention dimension (mm):
6850 (Length) X7100 (Front) X6970 (Back)
Walking speed: 0-2.0km/ h
Motor voltage: AC380V(three phase)
Diesel engine:
Model: 4TNV88C (Yanmar)
Rated output: 29.1kW/2400 min^{-1}
Applied regulation/Altitude:
EPA-Tier4, EC stage V/1200m
Type of operation (crane, walk, outrigger):
Wireless remote and Dual axis joystick
Dimension (Length×Width×Height):
6380mm×1780mm×2480mm
Weight (Crane + Hydraulic fly jib):
11800kg+450kg

Website www.sptcrane.com

SG80





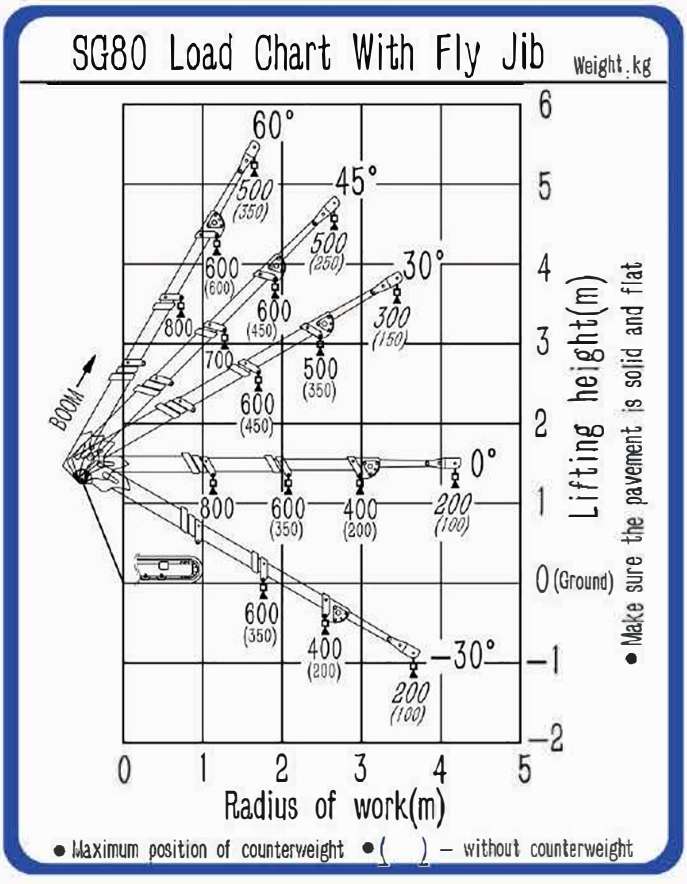

Capacity: 800kgX1.2m

Ground lifting height:

4.2mX600kg / 5.0mx500kg (Fly jib)

Walking speed: 0-1.2km/h

Motor voltage:

AC380V(three phase)

Gasoline engine:

Model: 25V000 (Briggs & Stratton)

Rated output: 10kW/3600 min^{-1}

Applied regulation/Altitude:

EU stage V/1200m

Type of operation (crane, walk) :

Wireless remote and manual

Dimension (Length × Width × Height (Min)) :

1880(1580)mm × 1150 (780)mm × 1700 (1550)mm

Weight (Maximum state (Minimum state)) :

1650kg (990kg-Excluding ballast and option)

S7 (S11 S35)

'Sky' series safe spider crane,
Bring you endless operational fun!





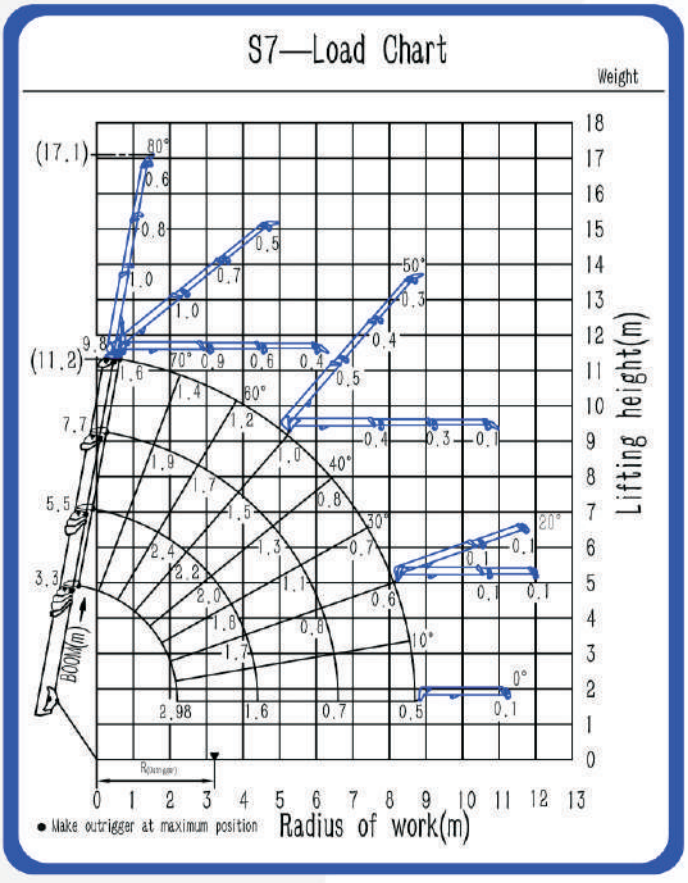

Capacity: 2.98t×2.2m
Ground lifting height:
11.2m×1.6t / 17.1m×0.6t (with fly jib)
Outrigger Maximum extention dimension (mm) :
4700 (Length) ×4700 (Width)
Walking speed: 0-2.0km/ h
Motor voltage:
AC380V(three phase)
Diesel engine:
Model: D902 (Kubota)
Rated output: 11.8kW/ 2300 min^{-1}
Applied regulation / Altitude:
EC stage V , EPA-Tier4 / 1200
Type of operation (crane, walk, outrigger) :
Wireless remote and manual
Dimension (Length×Width×Height) :
3900mm×770mm×1950mm
Weight (Crane + Hydraulic fly jib) :
2900kg

Glass Installation



Steel Structure Installation



Substation Construction



Building Roof&floor Construction

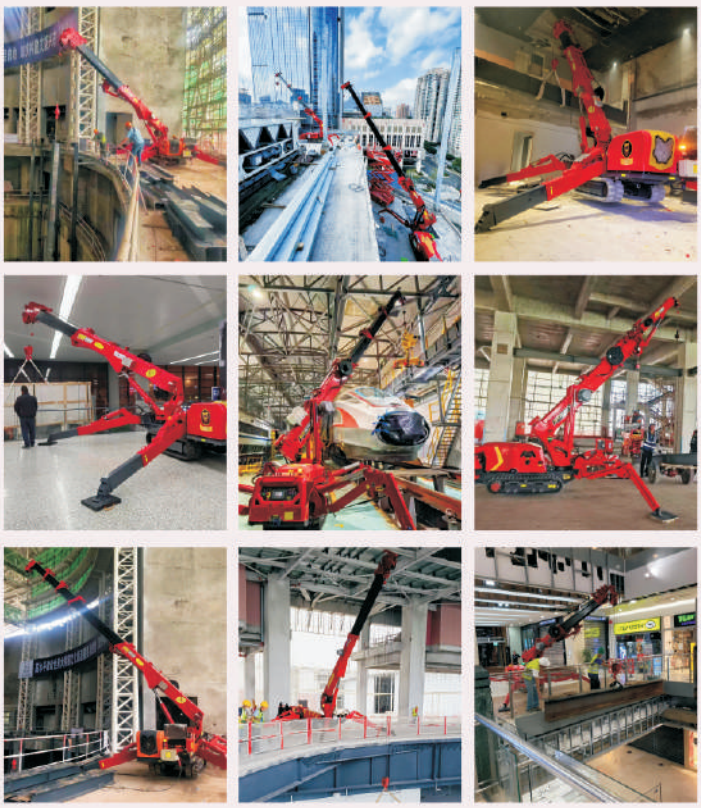

Website www.sptcrane.com

Global Dealers


Germany


Poland


Netherlands


Australia


Russia


United Arab Emirates


Canada



Taiwan (China)


Singapore


Brazil


Iran

KSM Utilaje
expertul tau in utilaje
Romania

ADD.: NO.7, QINGLIANGSI AVENUE, LIANGYUAN DISTRICT
SHANGQIU,HENAN, CHINA.
Email: info@sptcrane.com