


CHALLENGER

HEAVY-DUTY SOLID RESILIENT RANGE OF TYRES.

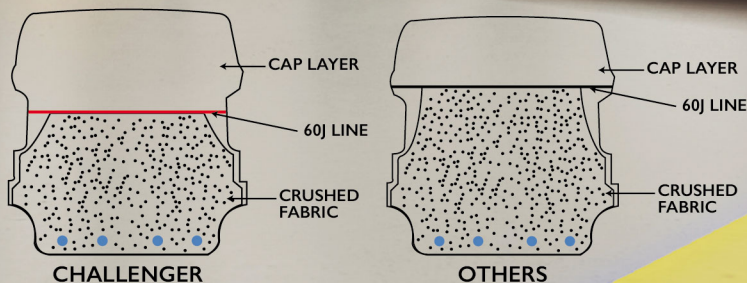

**Make a solid move to
reduce your downtime
for forklift application.**

Marketed by JK Tyre & Industries Ltd.



Why Challenger

Made with a fusion of new-age technology and premium raw materials, challenger solid resilient tyres have flawless stability & puncture resistance.

Features & Benefits



Durability

Designed for safe and accurate operation.



Comfort

Provides better cushioning and comfort for operators.



Compounding

Special Formulated Compound with higher resistance to Wear & Tear during operation.



Pattern

Wide Trend Pattern for high Stability and better traction on every terrain.

Construction

Standard - Two stage construction for up to 12 hour operation

Premium - Three stage construction for up to 18 hour operation

Technical Table

SR. NO	SIZE	RIM SIZE	OD	SW	LOAD DETAILS (KG)		
			MM	MM	UP TO 6KMPH	UP TO 10KMPH	UP TO 25KMPH
1	18X7X8	4.33 X 8	445	163	2145	1945	1650
2	6.00X9	4.00E X 9	517	133	1885	1710	1450
3	21X8-9	6.00 X 9	525	180	2755	2500	2120
4	6.50X10	5.00 X 10	570	160	2340	2125	1800
5	6.50X10	5.50 X 10	570	160	2340	2125	1800
6	7.00X12	5.00 X 12	651	170	2920	2645	2240
7	8.15X15	6.5 X 15	685	215	3900	3540	3000
8	28X9-15	7.0 X 15	685	215	3900	3540	3000
9	7.00X15	6.0 X 15	734	187	3545	3215	2725
10	7.50X15	6.0 X 15	734	187	3900	3540	3000
11	7.50X16	6.0 X 16	734	187	3965	3600	3050
12	8.25X15	6.5 X 15	805	207	4750	4300	3650
13	8.25X16	6.0 X 16	805	207	4820	4365	3705
14	5.00-8	3.00X8 / 3.25X8	450	133	1415	1285	1090
15	9.00-20	7.00 X 20	995.5	240	5400	4905	4500
16	10.00-20	7.50 X 20 / 8.00 X 20	1040	255.5	6000	5450	5000