



RAISING THE BAR IN PERFORMANCE WITH

MXT 1740



 **BHARAT
BUILT**
FOR THE WORLD

Engine Power	74.5 hp
Max. Capacity	4000 kg
Max. Lift Height	17.40 m
Max. Outreach	13.48 m
Powered by BSV Engine	

CAPACITIES

Max. capacity	4000 kg
Max. lifting height	17.4 m
Max. outreach	13.48 m

WEIGHT AND DIMENSIONS

Length to face of forks (l2)	6.22 m
Overall width (b1)	2.38 m
Overall height (h17)	2.61 m
Wheelbase (y)	2.90 m
Ground clearance (m4)	0.39 m
Overall cab width (b4)	0.85 m
External turning radius (over tyres)(Wa1)	4.05 m
Unladen weight (with forks)	11,530 kg
Forks length / width / section (l / e / s)	1200 x 125 x 50 mm

ENGINE

Engine brand	Kirloskar
Engine norm	BS-V
Engine model	4R1190TA- HT BSV
Number of cylinders / Capacity of cylinders I.C. Engine power rating - Power	4 - 4760 cm ³ 74.50 Hp / 54.80 kW
Max. torque / Engine rotation	400 Nm@ 1200rpm
Drawbar pull (Laden)	10200 daN

TRANSMISSION

Transmission type	Torque converter with manual transmission
Number of gears (forward / reverse)	4 / 4
Max. travel speed	26 km/h
Parking brake	Manual
Service brake	Oil-immersed multi-discs braking on front & rear axles

HYDRAULICS

Hydraulic pump type	Gear pump
Hydraulic flow / Pressure	102.5 lpm - 250 bar

TANK CAPACITIES

Engine oil	9.5 l
Hydraulic oil	120 l
Fuel tank	100 l






NOISE AND VIBRATION

Noise at driving position (LpA)	85 dB
Noise to environment (LwA)	110 dB

MISCELLANEOUS

Controls	Monolever
----------	-----------

MXT 1740 K BSV - DIMENSIONAL DRAWING

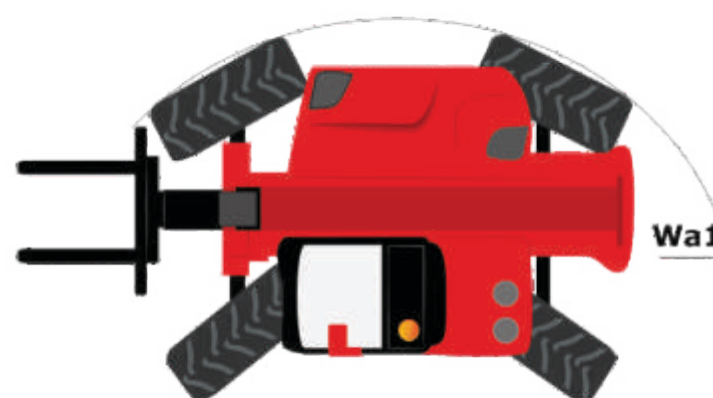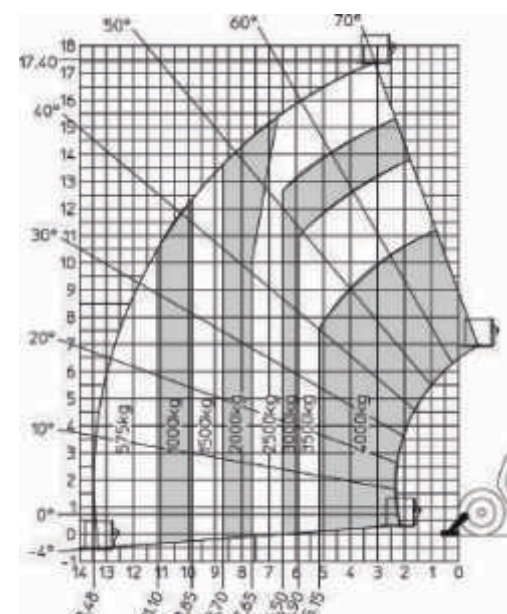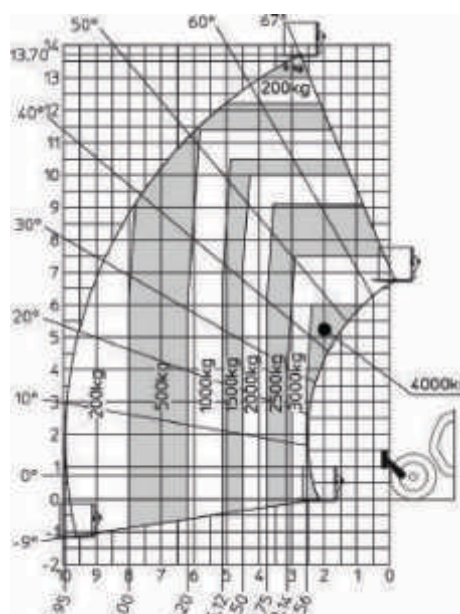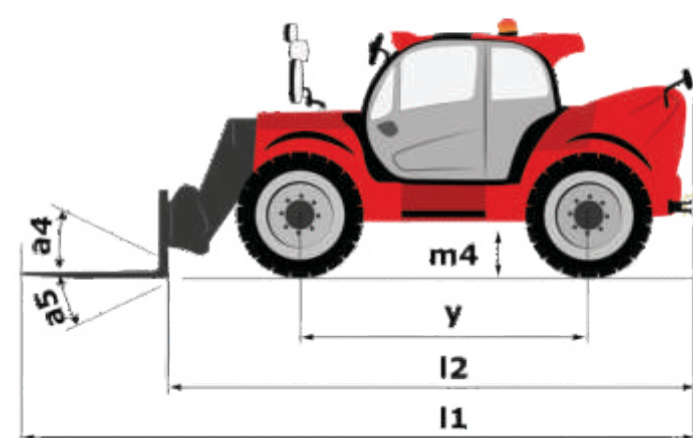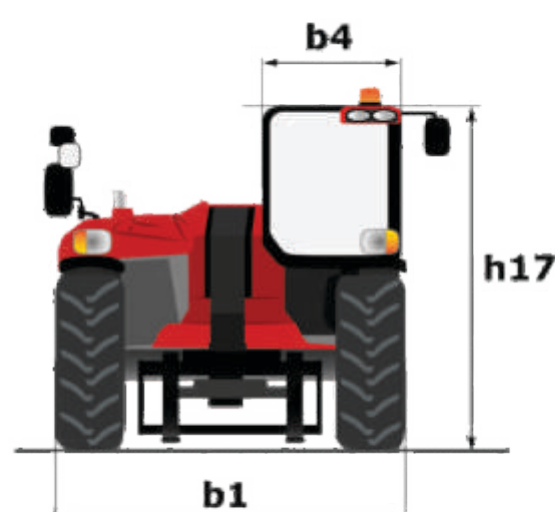

Effective Date: July 2025. All dimensions, weights & timings are variable within 1.5%, Company reserves the right to change specifications without prior notice. The illustration do not necessarily show the standard version of the machine. Product specifications & prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instruction on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product & sale & we make no other warranty, express or implied.



MANITOU SOUTH ASIA PRIVATE LIMITED,
Regd. Office: Ground Floor, Plot- B-1, Block- B-1
Mohan Cooperative Industrial Estate, Mathura Road, New Delhi-110044.
Email: info.mind@manitou-group.com, Web: www.manitou.com

Call Toll-Free 1800 103 7600 For Raising Your All Queries

Follow us for new updates     

Your Dealer